

EDGETEQ

S-356

EDGETEQ S-356
EDGETEQ S-356 TWO COLOR
EDGETEQ S-356 TWO COLOR With V-belt



EDGETEQ S-356 entry into the industrial class

The EDGETEQ S-356 offers complete processing due to its comprehensive equipment. The powerful motors on all units provide the unrestricted power which is needed to process a broad spectrum of different parts. Whereas the joint trimming unit guarantees the ideal formatting of the panel, the Quick Melt gluing unit guarantees the optimal edge banding. The snipping unit is equipped with 2 motors and offers a highly precise cut.

High performance of the trimming units are rounding off the picture. The 4-motor profile trimming unit enjoys all the advantages of an entire processing, being supported by the profile scraping unit, the glue joint scraping unit and the buffing unit, making the finish absolutely perfect.



Profile trimming unit: For profile trimming of thick PVC edges. Workpiece thickness up to 60 mm. Standard pneumatic on/off. For easy operating. Max. feed speed 25 m/min.



Joint trimming unit: Perfect cut and long service life due to diamond tipped tools for optimum edge joint quality.

Series EDGETEQ S-356 – the highly flexible all-rounder.

- HOMAG gluing system high quality gluing from top to down, fresh glue and accurate gluing temperature.
- Snipping unit more stable and strong structure with double guiders and reliability.
- Fine trimming unit more stable, keep high product quality.
- Corner rounding unit more stable and high quality, 4 motors design, easy adjustment and high speed up to 25 m/min.



EDGETEQ S-356	
Machine length (mm)	8, 499
Weight (kg)	4, 200
Feed speed (m/min)	16 – 25
Edge thickness (mm)	0.4 – 3
Workpiece thickness (mm)	12 – 60

YOUR BENEFITS AT A GLANCE

- Optimum glue application on the narrow surface.
- Changes to workpiece thicknesses do not necessitate resetting of the glue application roller.
- Glue roller with integrated heating guarantees constant temperature and viscosity for all workpiece thicknesses.
- Tracing pad prevents wear of the application roller and ensures a consistent glue film thickness.
- Easy removal of the application unit.



Radiant heater: Strong adhesion through optimal pre heating of the workpiece.



Gluing unit and pre-melter: Quick-change application unit with hot melt glue supply from top. On-demand availability and perfect glue quality with Quickmelt.

EDGETEQ S-356: TWO COLOR

The EDGETEQ S-356 offers complete processing due to its comprehensive equipment. The powerful motors on all units provide the unrestricted power which is needed to process a broad spectrum of different parts. Whereas the joint trimming unit guarantees the ideal formatting of the panel, the Quick Melt gluing unit guarantees the optimal edge banding.


The snipping unit is equipped with 2 motors and offers a highly precise cut. High performance of the trimming units are rounding off the picture. The 4-motor profile trimming unit enjoys all the advantages of an entire processing, being supported by the profile scraping unit, the glue joint scraping unit and the buffing unit, making the finish absolutely perfect.



Gluing unit and pre-melter: Quick-change application unit with hot melt glue supply from top. On-demand availability and perfect glue quality with Quickmelt. (1 # optional PUR coating)




Joint trimming unit: Perfect cut and long service life due to diamond tipped tools for optimum edge joint quality.

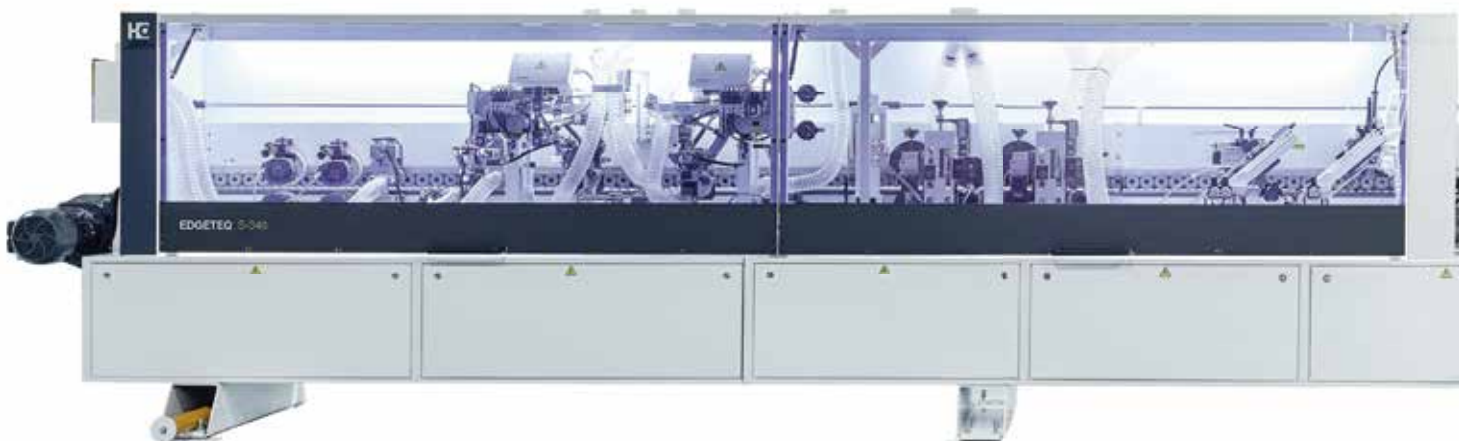

Series EDGETEQ S-356 TWO COLOR
the highly flexible all-rounder.

- HOMAG gluing system high quality gluing from top to down, fresh glue and accurate gluing temperature.
- Snipping unit more stable and strong structure with double guiders and reliability.
- Fine trimming unit more stable, keep high product quality.
- Corner rounding unit more stable and high quality, 4 motors design, easy adjustment and high speed up to 25 m/min.
- Can meet the switching use of EVA adhesive with different colors (or EVA+PUR)

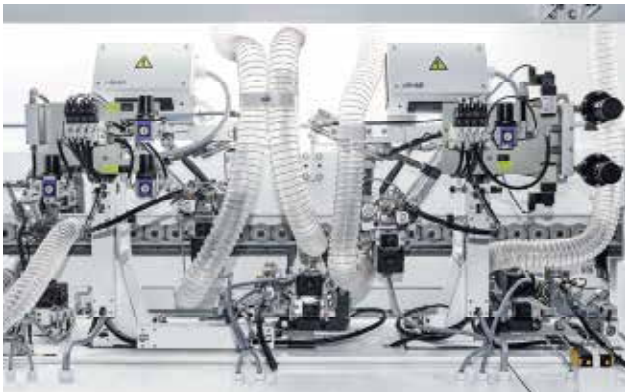

Profile trimming unit: For profile trimming of thick PVC edges. Workpiece thickness up to 60 mm. Standard pneumatic on/off. For easy operating. Max. feed speed 25 m/min.

EDGETEQ S-356 TWO CLOLOR

Machine length (mm) 8,939	8, 939
Weight (kg) 4,400	4, 400
Feed speed (m/min) 16 – 25	16 - 25
Edge thickness (mm) 0.4 – 3	0.4 - 3
Workpiece thickness (mm) 12 – 60	12 - 60



Double polishing device: meets the coating requirements of two different colors and improves the surface appearance quality. standard 1 pic polishing device.



YOUR BENEFITS AT A GLANCE

- Optimum glue application on the narrow surface.
- Changes to workpiece thicknesses do not necessitate resetting of the glue application roller.
- Glue roller with integrated heating guarantees constant temperature and viscosity for all workpiece thicknesses.
- Tracing pad prevents wear of the application roller and ensures a consistent glue film thickness.
- Easy removal of the application unit.

EDGETEQ S-356 TWO COLOR With V-belt

The EDGETEQ S-356 offers complete processing due to its comprehensive equipment. The powerful motors on all units provide the unrestricted power which is needed to process a broad spectrum of different parts. Whereas the joint trimming unit guarantees the ideal formatting of the panel, the Quick Melt gluing unit guarantees the optimal edge banding.



The steel upper pressure beam and V-belt are tightly pressed to ensure smooth delivery of the workpiece

- The upper pressure beam is made of thickened steel
- Double V upper compression conveyor belt

The snipping unit is equipped with 2 motors and offers a highly precise cut. High performance of the trimming units are rounding off the picture. The 4-motor profile trimming unit enjoys all the advantages of an entire processing, being supported by the profile scraping unit, the glue joint scraping unit and the buffing unit, making the finish absolutely perfect.



Controller - Easy to operate: The touch screen interface ensures quick integration and comfortable operation of the menu bar

- 15 inch large touch screen
- Rotatable angle



Series EDGETEQ S-356 TWO COLOR With V-belt– the highly flexible all-rounder.

- HOMAG gluing system high quality gluing from top to down, fresh glue and accurate gluing temperature.
- Snipping unit more stable and strong structure with double guiders and reliability.
- Fine trimming unit more stable, keep high product quality.
- Corner rounding unit more stable and high quality, 4 motors design, easy adjustment and high speed up to 25 m/min.
- Can meet the switching use of EVA adhesive with different colors (or EVA+PUR)


EDGETEQ S-356 TWO CLOLOR With V-belt

Machine length (mm) 8,939	8, 939
Weight (kg) 4,400	4, 400
Feed speed (m/min) 16 – 25	16 - 25
Edge thickness (mm) 0.4 – 3	0.4 - 3
Workpiece thickness (mm) 12 – 60	12 - 60



Pressure wheel group

- 1 main pressure wheel with power, diameter 86 mm
- 4 auxiliary pressure rollers, diameter 70 mm, 2 with taper
- Pneumatic compression and adjustment

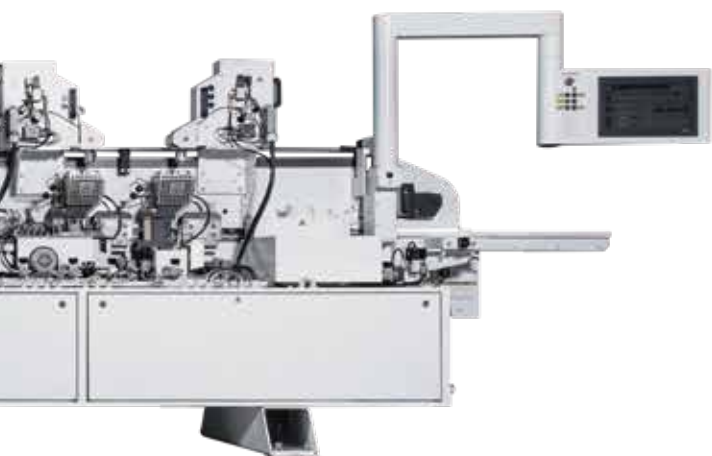



HOMAG Group AG

marketing-chn@homag.com
www.homag.com

For more details, please scan
the QR code to follow Homag China



WeChat
homag_china



HOMAG
Mini program

YOUR SOLUTION